



N3Z

DIN 36x72mm

-
- RPM (/) RPS (/)
-
-







	T3Z-6
	6-
	1:AC100 ~ 240V 50/60HZ 2:AC/DC12 ~ 24V
U	85-110%
	5 (AC240V), 3,2 (DC24V)
	, 6 (0 ~ 999999)
	1KHz
	0.1HZ ~ 1KHz
/	6 ~ 60000 / (1 /)
	± 0,1% FS. ± 1 (23 ± 5 C)
	(1)
	DC4.5-30V, «L» : DC0-2VDC («H»)
	12VDC ±10% 100mA Max
	AC2000V50/60Hz1min
	-10~+60°C(), :25-85%RH

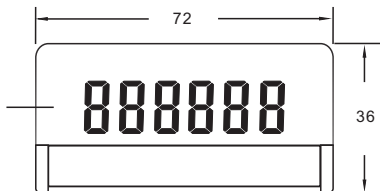

(1)

8 (mm)

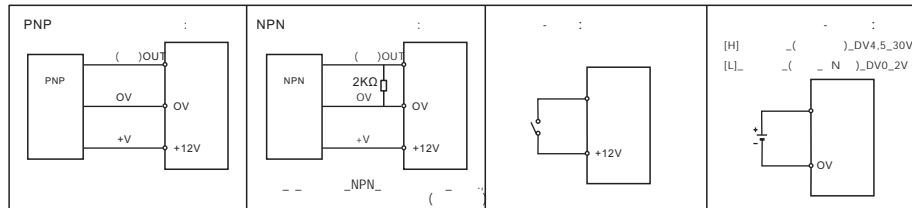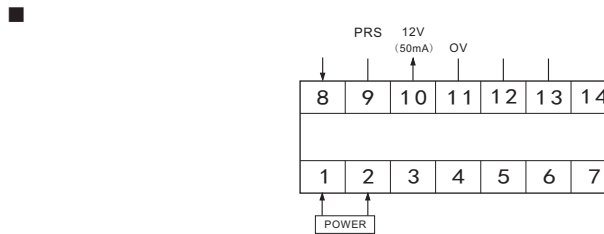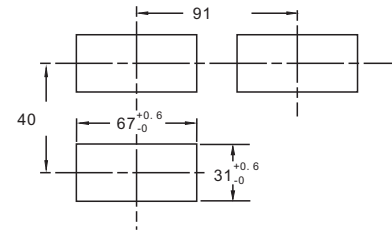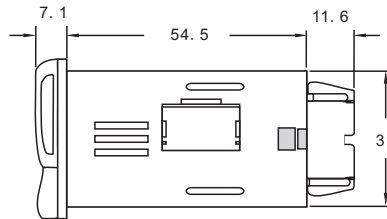

/	0"	()	T . . :
1/60	2	0.5	⑪ ⑫ ⑬ 11 12 13_ _
1/30	3	0.6	⑪ ⑫ ⑬ 11 13_
1/10	4	1.5	⑪ ⑫ ⑬ 11 12_)
1/1	10	6	⑪ ⑫ ⑬

1.: 11,12,13

: 1/10, 10

2. RPS / 9 11

3.: